

**NOTES:**

- (1) All dimensions are for rough framing.
- (2) All exterior walls to be 2x6 walls, unless noted otherwise.
- (3) All arches to have legs 9" lower than tops, which match interior doors.
- (4) All header heights are based on "their own" sub-floor/top of slab.
- (5) All exterior door and window headers at 8' UNO.
- (6) All interior doors to be 8' tall, UNO.


PROVIDE 1 HR. FIRE RATING BETWEEN GARAGE & HOUSE w/ 5/8" TYPE 'X' DRYWALL, FIRE TAPED AS A MINIMUM PER CODE REQUIREMENT

GARAGE TO BE A CONCRETE SLAB SLOPING FROM BACK TO FRONT AT 1/4" PER LINEAL FOOT

**FLOOR PLAN**  
SCALE: 3/16" = 1'-0"

**BUILDER:**  
**BUTLER DEVELOPMENTS, LLC**  
P.O. BOX 3030  
SHOW LOW, AZ 85902  
928-537-2434  
butlerdevelopments.com

Residence for:  
**Peschka**

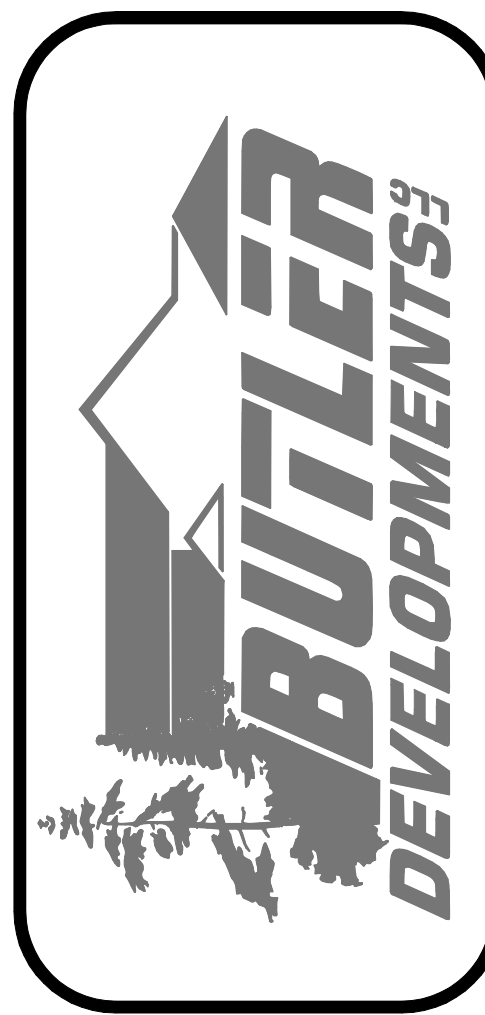

**4-8**